


YEAR 2005

CORE STATION 1103






ROAD NETWORK MINOR

ROAD TYPE LOCAL DISTRIBUTOR

LINK STANLEY VILLAGE RD (from TAI TAM RD to STANLEY NEW ST)



1. TRAFFIC FLOW VARIATION AND GROWTH

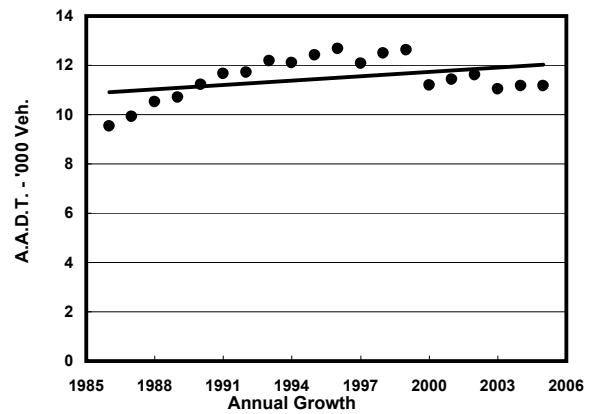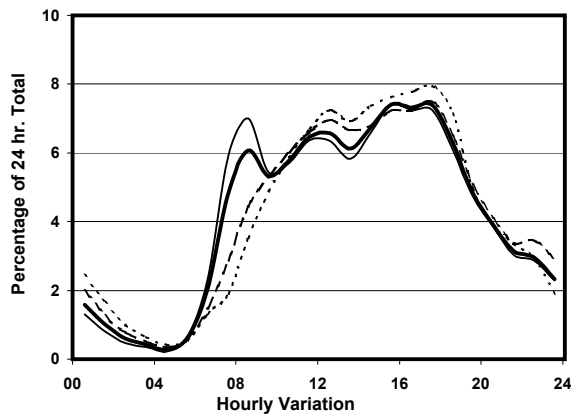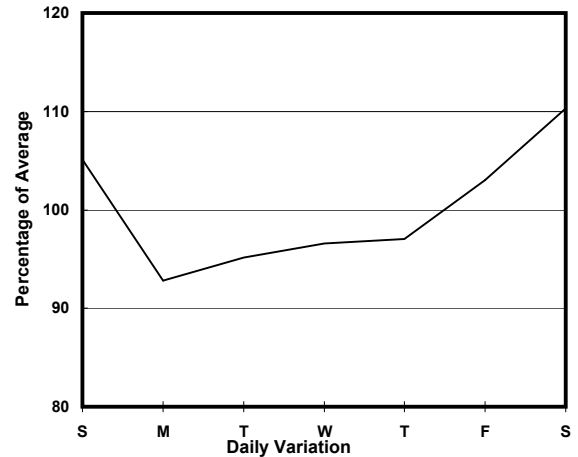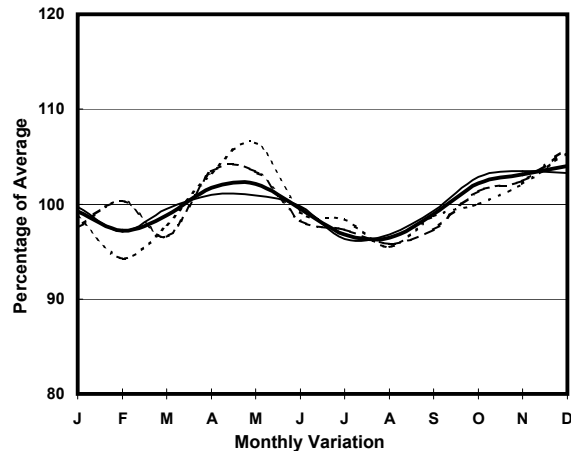

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	5650	5460	6240	5980
R 12 / 24 - %	74.9	75.2	73.9	75.3
R 16 / 24 - %	90.8	91.3	89.8	89.7
AM Peak Hour	0900-1000	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	330	350	350	340
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1600-1700	1600-1700	1600-1700
One-way flow at PM peak hour	390	370	440	450
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

NORTH BOUND				
A.A.D.T.	5510	5330	6060	5720
R 12 / 24 - %	77.7	79.2	74.3	74.5
R 16 / 24 - %	91.5	92	90.6	90.5
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	350	400	300	230
T - % (AM)	-	-	-	-
PM Peak Hour	1700-1800	1700-1800	1700-1800	1700-1800
One-way flow at PM peak hour	460	440	480	490
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT