


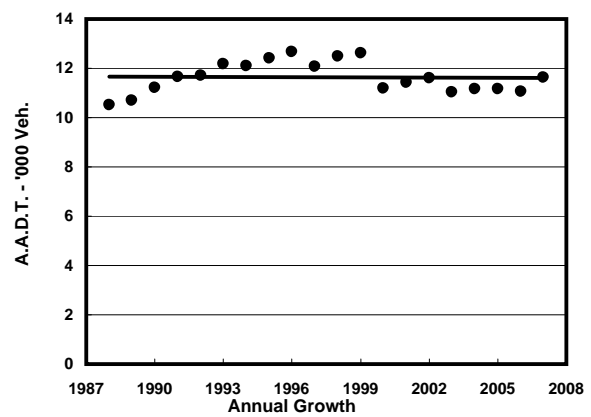
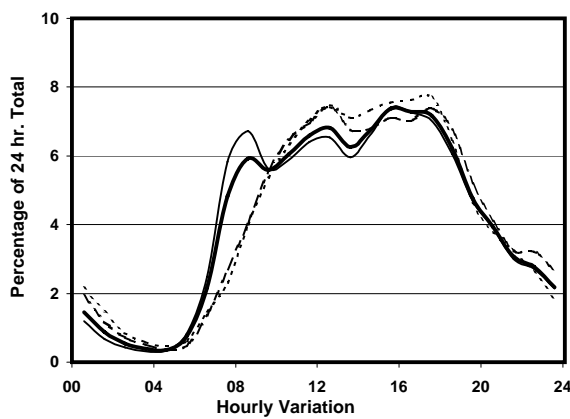
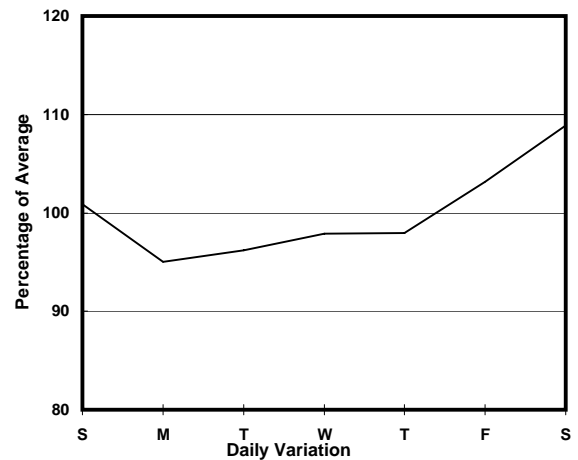


YEAR

2007

LINK STANLEY VILLAGE RD (from TAI TAM RD to STANLEY
NEW ST)CORE STATION
ROAD NETWORK
ROAD TYPE1103
MINOR
LOCAL DISTRIBUTOR

1. TRAFFIC FLOW VARIATION AND GROWTH

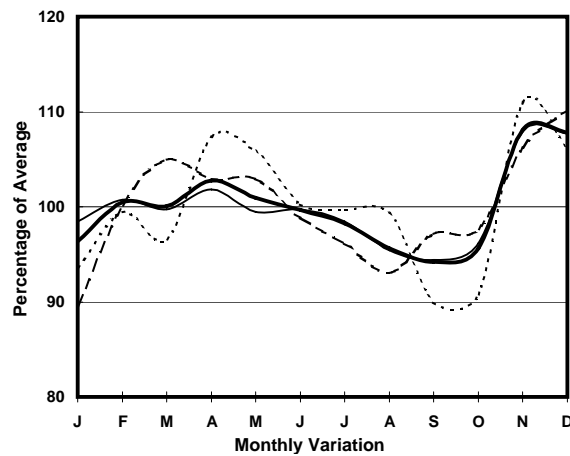

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	5900	5770	6460	6010
R 12 / 24 - %	75.1	75.1	74.1	75.8
R 16 / 24 - %	90.7	91	90	89.9
AM Peak Hour	0900-1000	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	350	360	380	360
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1600-1700	1700-1800	1600-1700
One-way flow at PM peak hour	410	390	450	450
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

NORTH BOUND				
A.A.D.T.	5730	5620	6210	5740
R 12 / 24 - %	78.6	79.6	76	76.8
R 16 / 24 - %	92	92.3	91.7	91.2
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	360	410	320	270
T - % (AM)	-	-	-	-
PM Peak Hour	1700-1800	1600-1700	1700-1800	1700-1800
One-way flow at PM peak hour	450	440	490	470
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT