


YEAR 2008

COVERAGE (B) STATION 2202






ROAD NETWORK MAJOR

ROAD TYPE DISTRICT DISTRIBUTOR

LINK WONG NAI CHUNG GAP RD (from STUBBS RD FO
<H119> SOUTHERN END to REPULSE BAY RD)



1. TRAFFIC FLOW VARIATION AND GROWTH

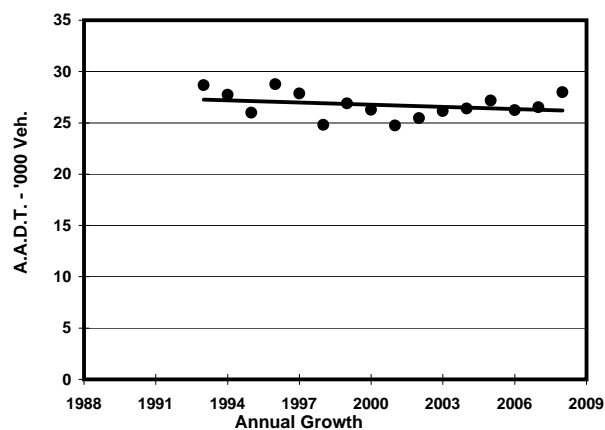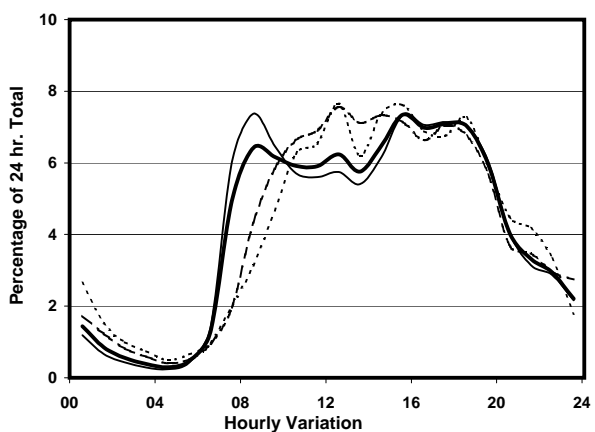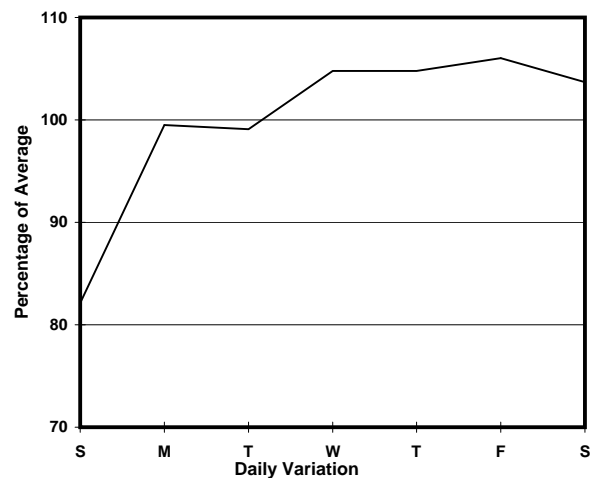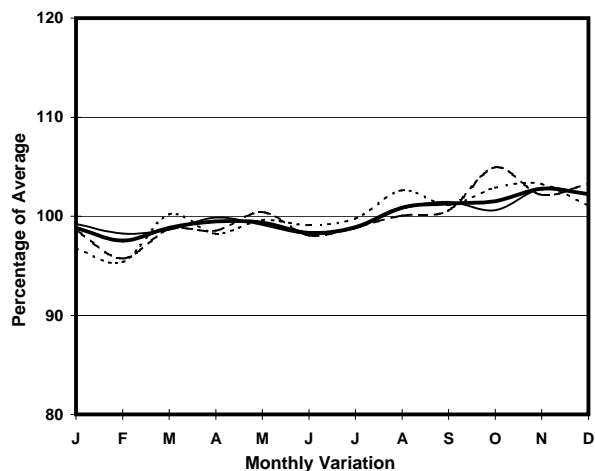

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	12780	13170	13350	11110
R 12 / 24 - %	76.9	77.5	76.2	73.9
R 16 / 24 - %	93.1	93.5	92.1	91.9
AM Peak Hour	0900-1000	0700-0800	0900-1000	0900-1000
One-way flow at AM peak hour	760	860	840	560
T - % (AM)	-	10.9	-	-
PM Peak Hour	1600-1700	1600-1700	1700-1800	1600-1700
One-way flow at PM peak hour	920	960	910	790
T - % (PM)	-	6.2	-	-
Prop.of commercial vehicles - 16 hr.	-	5.9	-	-
NORTH BOUND				
A.A.D.T.	15210	15890	15980	12070
R 12 / 24 - %	75.7	76.7	74.4	70.8
R 16 / 24 - %	92	92.9	90.1	88.6
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	1090	1350	870	520
T - % (AM)	-	3.6	-	-
PM Peak Hour	1700-1800	1700-1800	1700-1800	1800-1900
One-way flow at PM peak hour	1130	1190	1160	930
T - % (PM)	-	7	-	-
Prop.of commercial vehicles - 16 hr.	-	6.4	-	-

3. OTHER INFORMATION AND COMMENT

4. Vehicle classification and occupancy - Monday to Friday

Time		Class of vehicle									
		Motor Cycle	Private Car	Taxi	Private LB	PLB	Goods veh.		Non Fr. Bus	Fr. Bus	
							Light	M & H		SD	DD
0700-0800	Pro	3.6	39.2	36.5	6.9	1.0	3.0	0.3	6.9	1.1	1.5
	Ocp	1.0	1.5	1.7	5.8	12.0	1.9	4.0	14.6	20.7	35.8
0800-0900 Peak hour	Pro	2.1	64.9	17.9	2.4	1.0	5.9	0.3	4.3	0.5	0.6
	Ocp	1.0	1.3	1.9	4.3	7.7	1.5	1.5	9.3	15.4	31.8
0900-1000	Pro	2.9	57.2	22.0	2.2	1.5	9.0	1.8	1.8	0.6	1.0
	Ocp	1.2	1.5	1.8	5.8	11.1	2.0	1.1	10.9	10.8	26.4
1000-1100	Pro	3.1	50.9	23.6	2.1	0.8	13.6	1.8	2.3	0.7	1.2
	Ocp	1.0	1.4	1.6	3.4	7.3	1.6	1.6	13.2	9.7	13.4
1100-1200	Pro	2.3	51.4	23.0	1.5	0.5	14.3	2.0	2.8	0.8	1.2
	Ocp	1.1	1.4	1.8	2.3	6.0	1.8	1.3	6.5	10.2	17.7
1200-1300	Pro	3.4	47.9	26.4	3.1	1.2	10.8	1.4	4.3	0.7	0.8
	Ocp	1.1	1.5	1.6	4.5	6.8	1.6	1.3	15.8	9.2	24.6
1300-1400	Pro	3.8	44.1	27.2	2.7	0.8	13.1	1.9	4.1	0.9	1.4
	Ocp	1.0	1.4	1.5	3.7	6.3	1.6	1.6	13.7	10.3	20.8
1400-1500	Pro	2.3	46.1	29.9	1.3	1.0	11.9	1.8	4.1	0.7	1.0
	Ocp	1.0	1.6	1.5	2.2	6.8	1.7	1.3	3.4	10.1	28.9
1500-1600	Pro	2.2	50.3	26.3	3.8	1.0	9.5	1.0	4.8	0.6	0.6
	Ocp	1.1	1.6	2.1	5.4	9.2	1.9	1.6	11.1	13.6	18.5
1600-1700	Pro	2.9	56.4	21.6	3.1	0.9	8.5	1.5	3.9	0.5	0.8
	Ocp	1.1	1.6	1.8	3.4	9.6	1.8	1.9	5.5	16.8	25.9
1700-1800	Pro	3.9	56.4	23.4	2.5	0.9	6.4	0.4	4.8	0.5	0.7
	Ocp	1.0	1.6	2.1	2.7	12.0	2.3	1.0	24.2	24.2	45.3
1800-1900	Pro	4.9	50.5	33.6	0.8	0.8	2.7	0.2	5.1	0.6	0.8
	Ocp	1.2	1.7	1.8	6.0	14.3	2.0	1.0	21.9	23.7	44.8
1900-2000	Pro	2.9	56.3	35.4	0.7	0.7	0.2	0.0	2.4	0.6	0.9
	Ocp	1.0	1.6	1.7	2.3	12.0	1.0	0.0	24.5	17.0	25.8
2000-2100	Pro	4.2	53.2	38.4	0.0	1.4	1.1	0.0	0.0	0.7	1.1
	Ocp	1.3	1.4	1.5	0.0	5.8	1.3	0.0	0.0	10.8	15.1
2100-2200	Pro	1.0	48.1	44.8	0.0	1.4	1.4	0.0	1.0	0.8	1.4
	Ocp	1.0	1.5	1.6	0.0	6.0	1.0	0.0	6.5	8.1	10.8
2200-2300	Pro	3.7	46.6	45.2	0.5	1.4	0.5	0.0	0.5	0.6	1.3
	Ocp	1.0	1.6	1.6	1.0	3.7	2.0	0.0	1.0	6.2	12.0
16 hours	Pro	3.1	52.3	27.9	2.2	1.0	7.4	1.0	3.6	0.7	1.0
	Ocp	1.1	1.5	1.7	4.3	8.8	1.8	1.5	13.7	14.1	25.3

Legend

Pro. Proportion of vehicles in % (Sum may not add up to 100% due to figure rounding)
Ocp. Average occupancy of vehicles
M&H Medium and Heavy