


YEAR 2010

CORE STATION 5029


ROAD NETWORK MAJOR

ROAD TYPE EXPRESSWAY

LINK TSING LONG HIGHWAY - TAI LAM TUNNEL (from AU TAU INT to TUEN MUN RD)



1. TRAFFIC FLOW VARIATION AND GROWTH

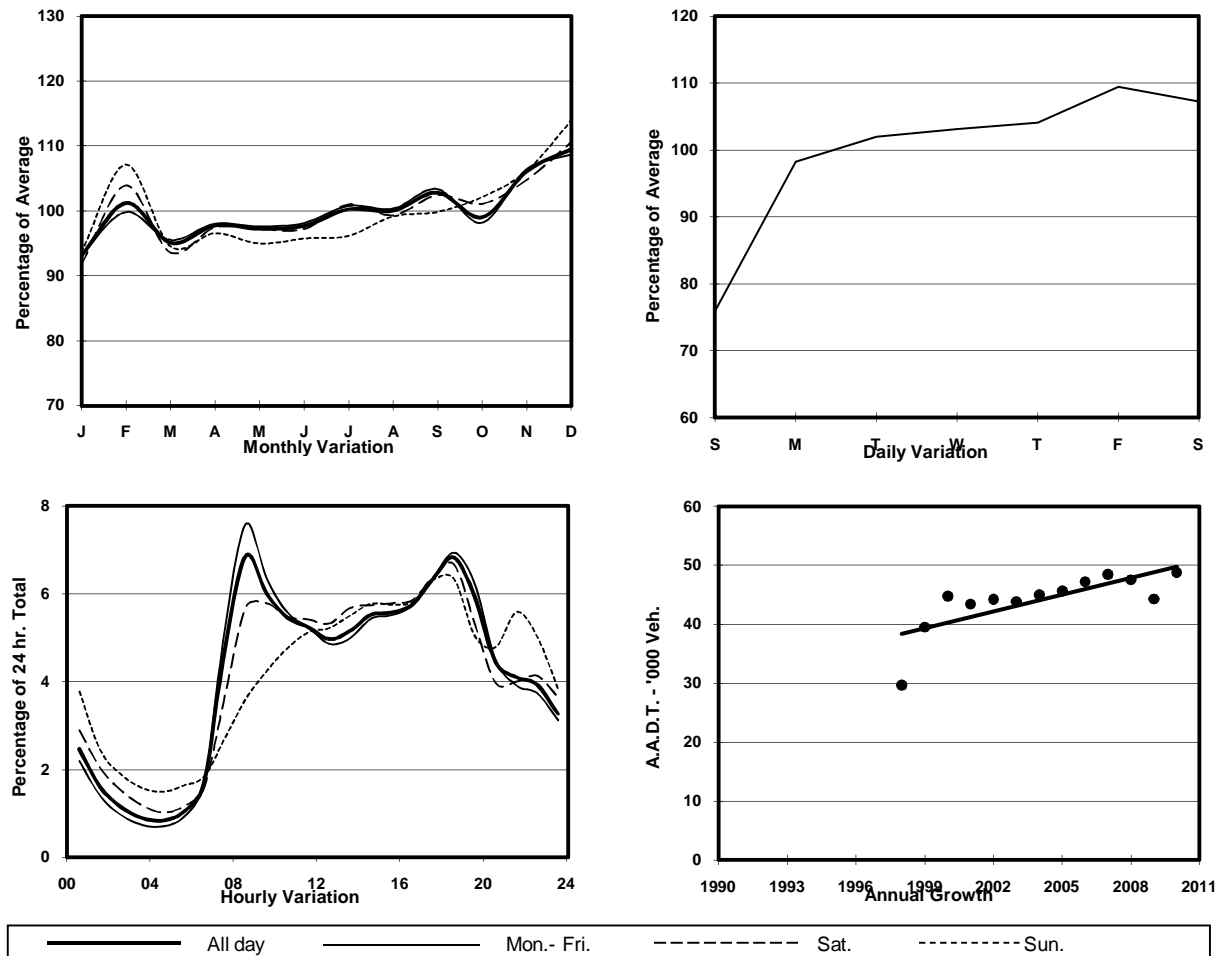

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	24630	25850	26620	18870
R 12 / 24 - %	74.2	75.7	72.2	66.2
R 16 / 24 - %	88.5	89.4	87.1	84.3
AM Peak Hour	0800-0900	0800-0900	0800-0900	0900-1000
One-way flow at AM peak hour	2340	2750	2060	930
T - % (AM)	-	27.5	-	-
PM Peak Hour	1700-1800	1700-1800	1800-1900	1700-1800
One-way flow at PM peak hour	1440	1480	1650	1250
T - % (PM)	-	37.2	-	-
Prop.of commercial vehicles - 16 hr.	-	30.1	-	-
NORTH BOUND				
A.A.D.T.	24200	25340	26200	18710
R 12 / 24 - %	62.9	63.9	62.9	56
R 16 / 24 - %	85.5	87	82.8	78.7
AM Peak Hour	0900-1000	0900-1000	0900-1000	0900-1000
One-way flow at AM peak hour	1140	1250	1150	660
T - % (AM)	-	35.4	-	-
PM Peak Hour	1800-1900	1800-1900	1800-1900	1800-1900
One-way flow at PM peak hour	1900	2090	1880	1150
T - % (PM)	-	28.7	-	-
Prop.of commercial vehicles - 16 hr.	-	34.1	-	-

3. OTHER INFORMATION AND COMMENT

4. Vehicle classification and occupancy - Monday to Friday

Time		Class of vehicle									
		Motor	Private	Taxi	Private	PLB	Goods veh.		Non	Fr. Bus	
		Cycle	Car		LB		Light	M & H	Fr. Bus	SD	DD
0700-0800	Pro	0.4	40.4	5.2	0.0	0.0	16.6	21.0	5.4	0.2	10.8
	Ocp	1.0	1.7	2.3	0.0	0.0	1.7	1.3	31.7	23.8	66.8
0800-0900 Peak hour	Pro	1.1	49.0	3.4	0.0	0.0	15.8	19.2	4.0	0.1	7.4
	Ocp	1.1	1.6	2.1	0.0	0.0	1.6	1.3	41.7	27.0	68.4
0900-1000	Pro	0.6	51.0	3.1	0.6	0.0	16.5	19.3	1.9	0.2	6.7
	Ocp	1.2	1.6	2.5	1.8	0.0	1.6	1.3	24.8	9.7	37.4
1000-1100	Pro	1.4	41.9	2.6	0.2	0.0	22.1	23.0	1.7	0.1	7.1
	Ocp	1.0	1.7	2.3	2.0	0.0	1.5	1.2	25.3	5.7	37.5
1100-1200	Pro	0.8	42.3	2.7	0.6	0.0	17.7	27.0	1.8	0.1	7.0
	Ocp	1.0	1.7	2.6	2.5	0.0	1.6	1.3	25.5	4.7	33.0
1200-1300	Pro	0.4	44.3	2.9	0.2	0.0	18.9	22.9	2.2	0.2	8.1
	Ocp	1.0	1.9	2.6	2.0	0.0	1.5	1.3	27.8	4.0	27.9
1300-1400	Pro	0.3	40.4	3.5	0.3	0.0	19.6	26.2	2.1	0.2	7.3
	Ocp	1.0	1.9	2.4	6.5	0.0	1.4	1.2	20.5	5.0	28.7
1400-1500	Pro	0.8	44.0	2.3	0.3	0.0	18.8	25.1	2.0	0.2	6.5
	Ocp	1.0	1.8	2.4	5.0	0.0	1.6	1.3	24.1	6.4	30.5
1500-1600	Pro	0.1	47.1	1.8	0.6	0.0	17.0	25.3	1.5	0.1	6.5
	Ocp	1.0	1.8	2.5	6.0	0.0	1.7	1.2	35.5	8.0	25.8
1600-1700	Pro	0.3	44.5	3.3	0.2	0.0	18.3	23.3	2.5	0.1	7.6
	Ocp	1.0	1.7	2.3	4.0	0.0	1.5	1.2	26.5	9.3	27.8
1700-1800	Pro	0.3	48.5	2.4	0.3	0.0	15.3	22.3	2.4	0.1	8.4
	Ocp	1.0	1.9	2.8	1.5	0.0	1.6	1.1	31.3	11.8	40.7
1800-1900	Pro	0.1	59.8	3.9	0.0	0.0	8.8	16.1	2.9	0.1	8.3
	Ocp	1.0	1.7	2.9	0.0	0.0	1.5	1.1	34.2	24.3	67.1
1900-2000	Pro	0.0	59.9	3.0	0.0	0.0	6.4	20.2	3.5	0.1	7.0
	Ocp	0.0	1.9	2.2	0.0	0.0	1.6	1.1	28.9	10.0	58.2
2000-2100	Pro	0.4	54.9	4.0	0.2	0.0	5.9	22.9	3.3	0.1	8.4
	Ocp	1.0	1.9	2.9	1.0	0.0	1.4	1.1	32.8	12.3	46.7
2100-2200	Pro	0.6	57.2	6.4	0.0	0.0	6.6	15.9	3.4	0.2	9.7
	Ocp	1.3	1.9	2.8	0.0	0.0	1.5	1.1	31.2	10.8	42.4
2200-2300	Pro	0.5	62.9	8.4	0.0	0.0	4.1	8.7	3.6	0.2	11.7
	Ocp	1.0	1.8	2.5	0.0	0.0	2.0	1.0	30.6	9.0	43.3
16 hours	Pro	0.5	49.1	3.5	0.2	0.0	14.6	21.3	2.7	0.1	7.8
	Ocp	1.1	1.8	2.5	3.4	0.0	1.6	1.2	30.9	11.1	44.4

Legend

- Pro.** Proportion of vehicles in % (Sum may not add up to 100% due to figure rounding)
- Ocp.** Average occupancy of vehicles
- M&H** Medium and Heavy