


YEAR 2012

CORE STATION 1011





ROAD NETWORK MAJOR

ROAD TYPE PRIMARY DISTRIBUTOR

LINK REPULSE BAY RD & STANLEY GAP RD (from SOUTH BAY RD to TAI TAM RD)



1. TRAFFIC FLOW VARIATION AND GROWTH

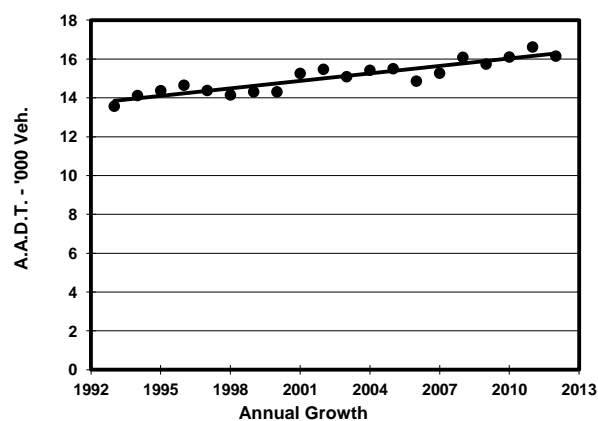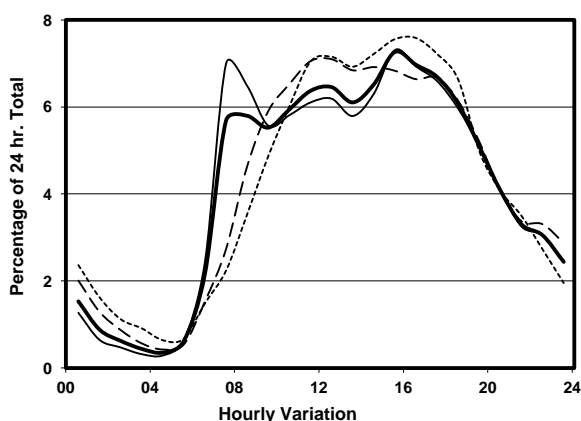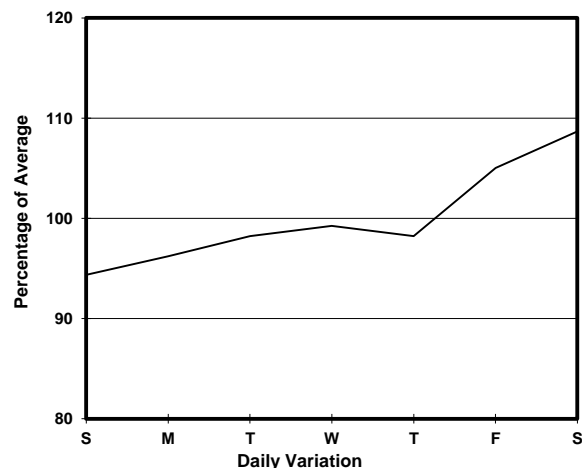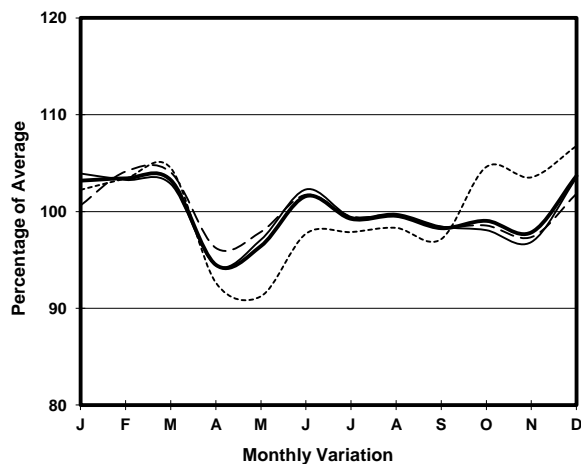

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	8050	8040	8720	7590
R 12 / 24 - %	74.4	74.7	73.5	73.9
R 16 / 24 - %	90.7	91.2	89.5	89.1
AM Peak Hour	0800-0900	0700-0800	0900-1000	0900-1000
One-way flow at AM peak hour	440	500	500	370
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1600-1700	1700-1800	1600-1700
One-way flow at PM peak hour	560	560	560	580
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-
NORTH BOUND				
A.A.D.T.	8100	8060	8930	7660
R 12 / 24 - %	76.4	77.3	74.5	74
R 16 / 24 - %	91.2	91.8	90.3	89.4
AM Peak Hour	0700-0800	0700-0800	0900-1000	0900-1000
One-way flow at AM peak hour	500	620	540	380
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1600-1700	1700-1800	1700-1800
One-way flow at PM peak hour	570	560	620	590
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT