


YEAR 2012

CORE STATION 1103





ROAD NETWORK MINOR

ROAD TYPE LOCAL DISTRIBUTOR

LINK STANLEY VILLAGE RD (from TAI TAM RD to STANLEY NEW ST)



1. TRAFFIC FLOW VARIATION AND GROWTH

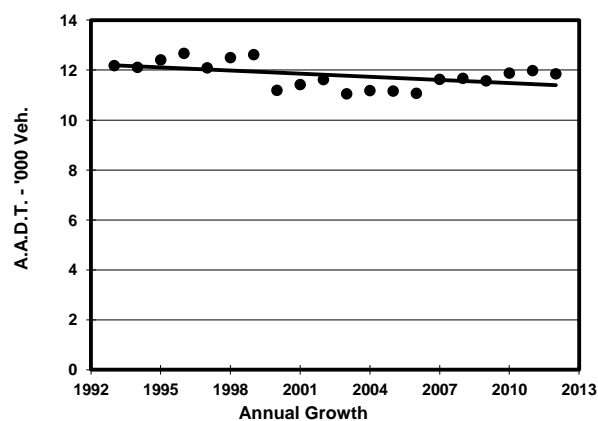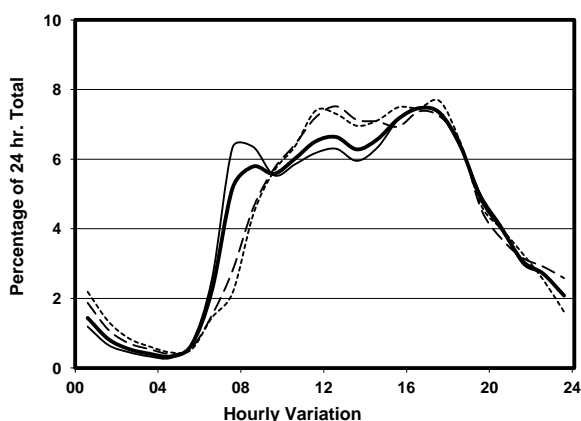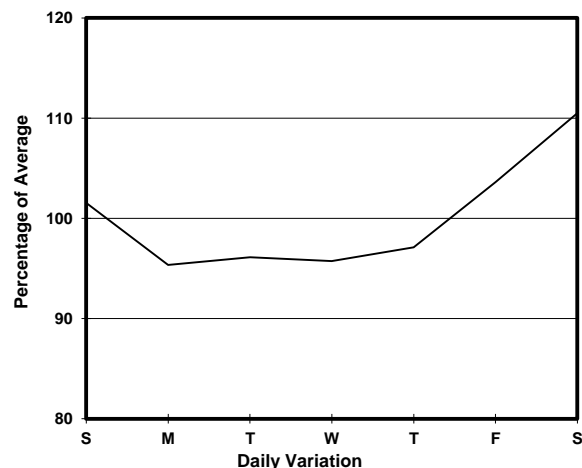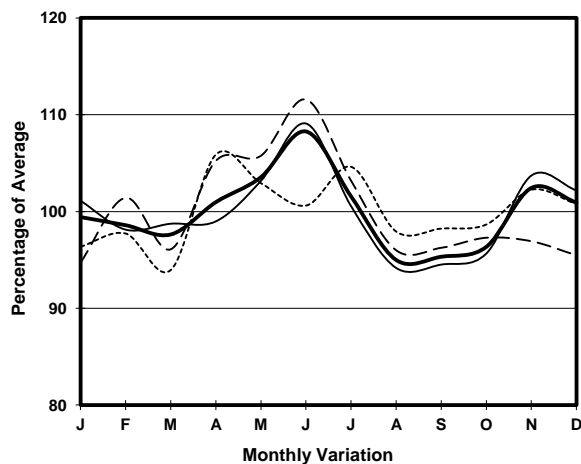

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	6070	5920	6640	6200
R 12 / 24 - %	75.3	74.9	75.8	76.4
R 16 / 24 - %	91.1	91.4	90.2	90.5
AM Peak Hour	0900-1000	0700-0800	0900-1000	0900-1000
One-way flow at AM peak hour	360	370	380	380
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1600-1700	1600-1700	1600-1700
One-way flow at PM peak hour	430	420	480	460
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-
NORTH BOUND				
A.A.D.T.	5780	5630	6400	5860
R 12 / 24 - %	78.6	79.3	77.1	76.6
R 16 / 24 - %	92	92.2	91.4	91.5
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	360	410	360	300
T - % (AM)	-	-	-	-
PM Peak Hour	1700-1800	1700-1800	1700-1800	1700-1800
One-way flow at PM peak hour	470	460	500	480
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT