


YEAR






2012

LINK

TAI PO RD (from NAM CHEONG ST to KWEILIN ST)

CORE STATION
ROAD NETWORK
ROAD TYPE3009
MAJOR
PRIMARY DISTRIBUTOR

1. TRAFFIC FLOW VARIATION AND GROWTH

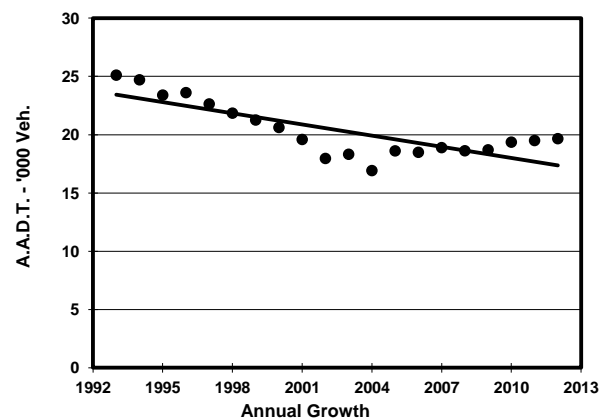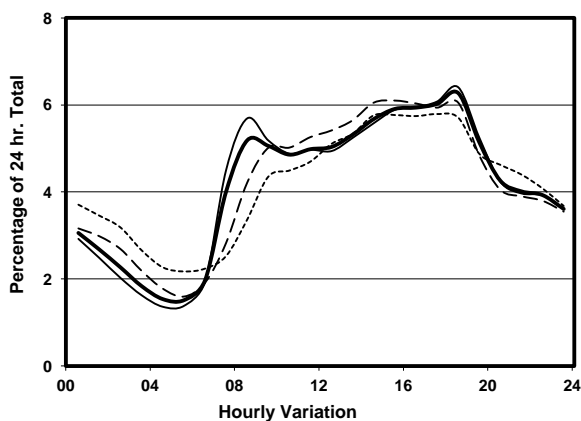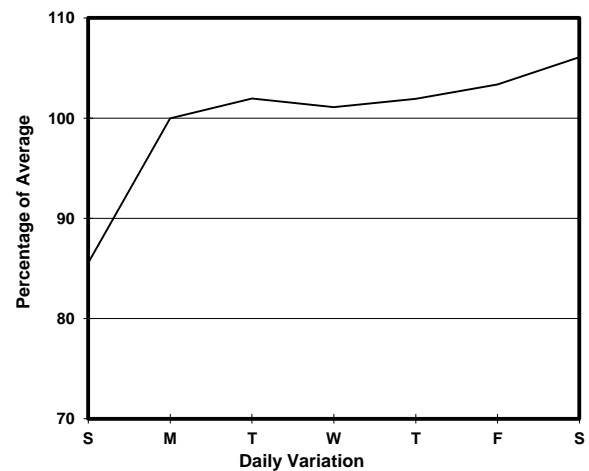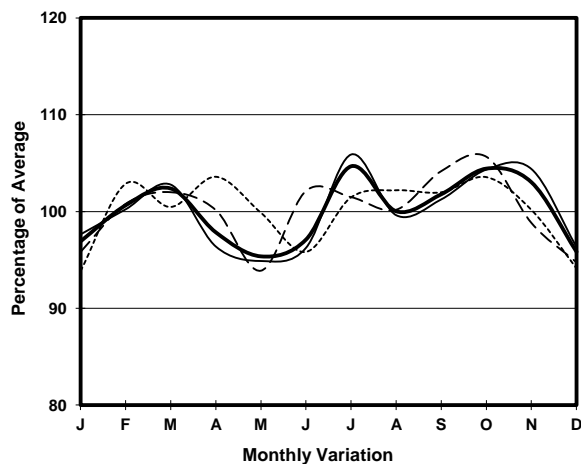

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	10080	10220	10780	9200
R 12 / 24 - %	60.2	61.3	58.9	55.6
R 16 / 24 - %	77.1	78.5	74.7	72.2
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	580	650	570	410
T - % (AM)	-	-	-	-
PM Peak Hour	1800-1900	1800-1900	1800-1900	1800-1900
One-way flow at PM peak hour	570	590	580	500
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-
NORTH BOUND				
A.A.D.T.	9580	9930	10230	7710
R 12 / 24 - %	68.5	69.5	68.5	62.3
R 16 / 24 - %	86.2	87	85.9	82
AM Peak Hour	0900-1000	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	470	500	490	330
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1800-1900	1600-1700	1600-1700
One-way flow at PM peak hour	670	700	710	500
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT