


YEAR 2013

CORE STATION 1103






ROAD NETWORK MINOR

ROAD TYPE LOCAL DISTRIBUTOR

LINK STANLEY VILLAGE RD (from TAI TAM RD to STANLEY NEW ST)



1. TRAFFIC FLOW VARIATION AND GROWTH

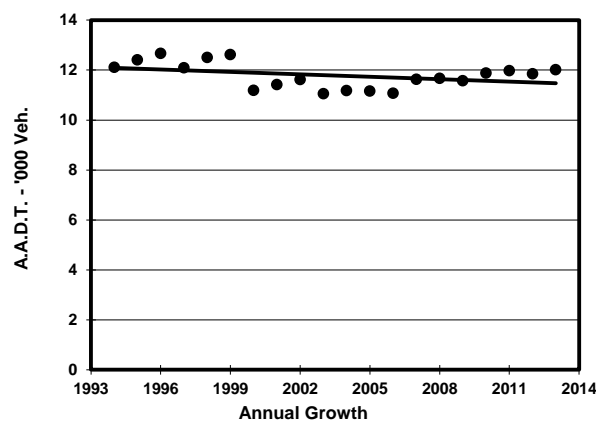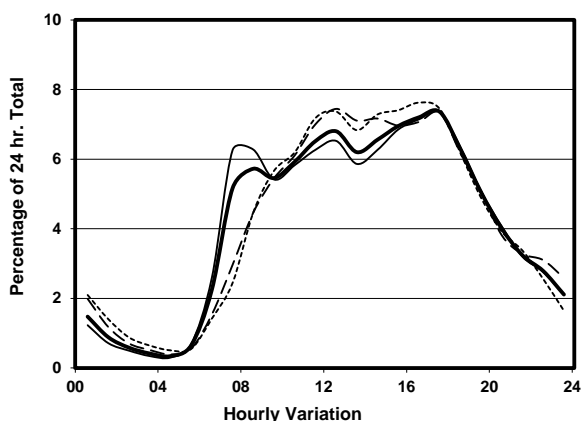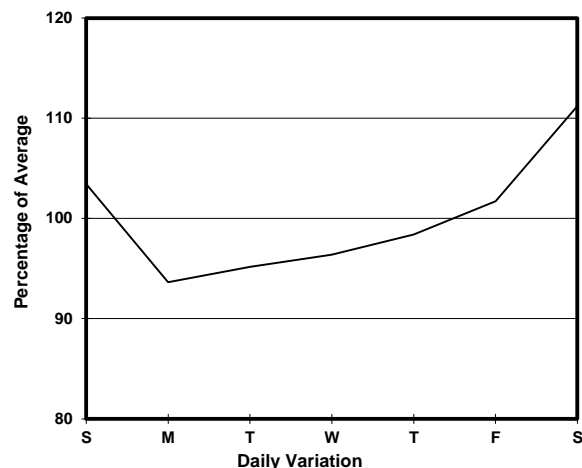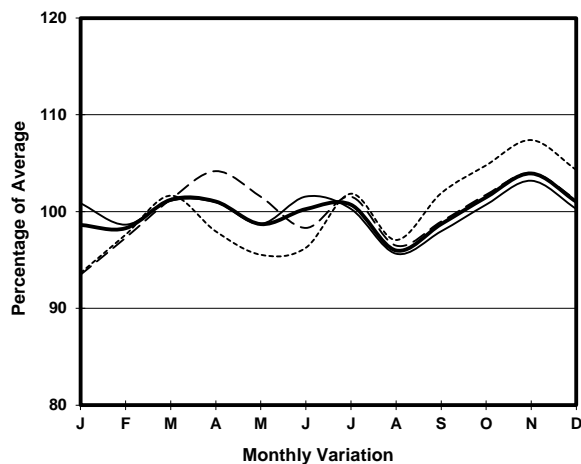

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	6160	5980	6770	6380
R 12 / 24 - %	75.2	74.9	75.1	76.6
R 16 / 24 - %	91.1	91.3	90.3	90.6
AM Peak Hour	0900-1000	0700-0800	0900-1000	0900-1000
One-way flow at AM peak hour	350	390	380	400
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1600-1700	1600-1700	1600-1700
One-way flow at PM peak hour	440	420	470	510
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-
NORTH BOUND				
A.A.D.T.	5850	5650	6550	6010
R 12 / 24 - %	77.2	78	75.4	75.7
R 16 / 24 - %	91.5	91.7	90.9	91.2
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	360	400	350	310
T - % (AM)	-	-	-	-
PM Peak Hour	1700-1800	1700-1800	1700-1800	1700-1800
One-way flow at PM peak hour	470	460	510	490
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT