


YEAR

2015






LINK SAN TIN HIGHWAY, CASTLE PEAK RD & SAN TAM RD
(from KAM TIN RD to FAIRVIEW PARK BOULEVARD)

CORE STATION
ROAD NETWORK
ROAD TYPE

5016
MAJOR
PRIMARY DISTRIBUTOR

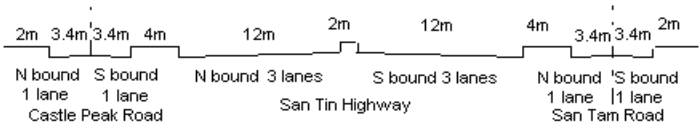

1. TRAFFIC FLOW VARIATION AND GROWTH

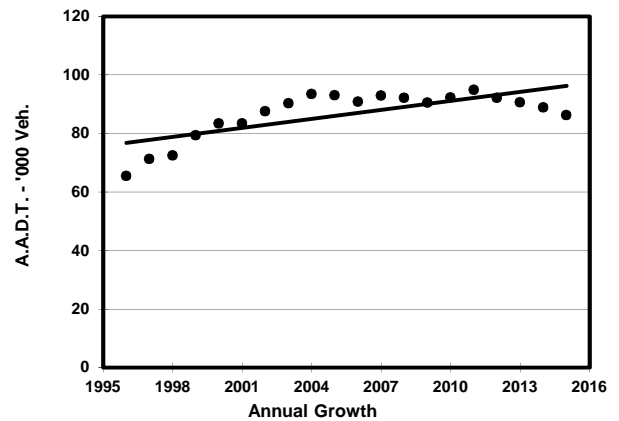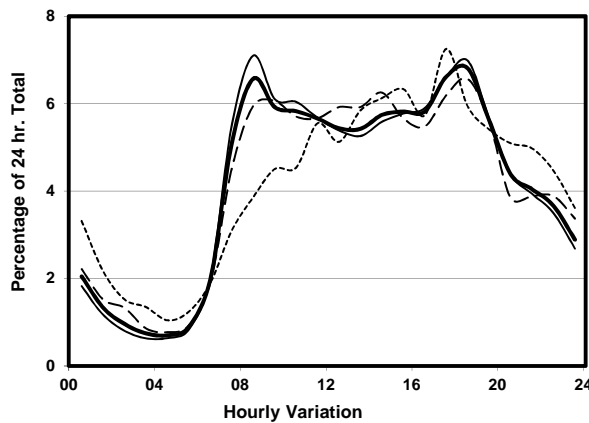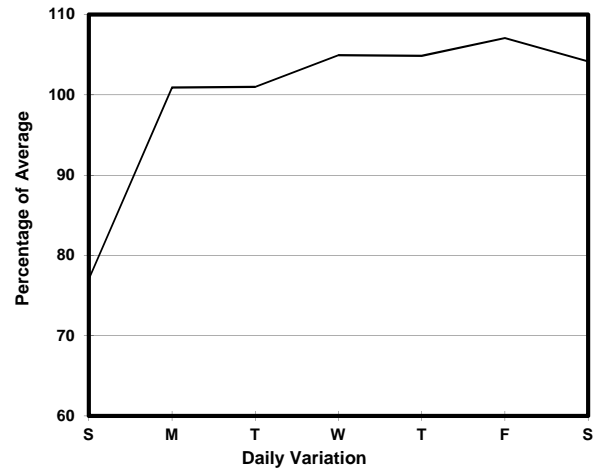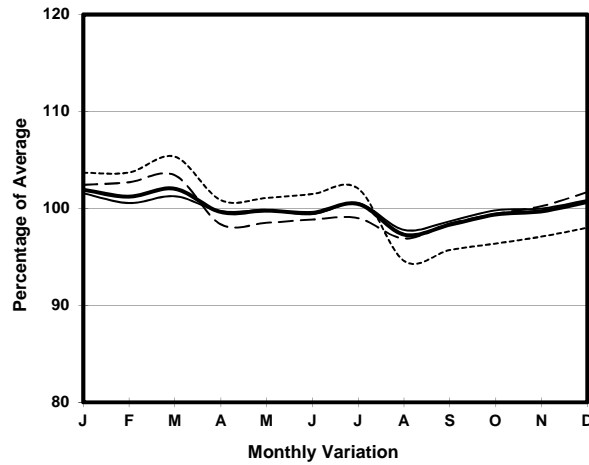

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	42930	45370	45270	32140
R 12 / 24 - %	71.2	72.4	71.2	62.7
R 16 / 24 - %	88.5	89.3	87.3	83.9
AM Peak Hour	0800-0900	0800-0900	0800-0900	0900-1000
One-way flow at AM peak hour	2940	3380	2760	1460
T - % (AM)	-	23.7	-	-
PM Peak Hour	1800-1900	1800-1900	1700-1800	1800-1900
One-way flow at PM peak hour	2990	3200	3000	2210
T - % (PM)	-	22.7	-	-
Prop.of commercial vehicles - 16 hr.	-	28.2	-	-
NORTH BOUND				
A.A.D.T.	43250	45150	45560	35180
R 12 / 24 - %	70.3	71.4	68.7	65
R 16 / 24 - %	88.4	89.5	86.9	83.8
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	2720	3050	2780	1570
T - % (AM)	-	23.3	-	-
PM Peak Hour	1800-1900	1800-1900	1800-1900	1700-1800
One-way flow at PM peak hour	2880	3120	2990	2800
T - % (PM)	-	20.3	-	-
Prop.of commercial vehicles - 16 hr.	-	26.2	-	-

3. OTHER INFORMATION AND COMMENT

4. Vehicle classification and occupancy - Monday to Friday

Time		Class of vehicle									
		Motor	Private	Taxi	Private	PLB	Goods veh.		Non	Fr. Bus	
		Cycle	Car		LB		Light	M & H	Fr. Bus	SD	DD
0700-0800	Pro	1.4	41.6	9.6	0.8	5.6	15.9	19.1	4.2	0.1	1.7
	Ocp	1.1	1.4	2.3	9.7	14.0	1.4	1.2	26.3	14.0	65.0
0800-0900 Peak hour	Pro	0.7	50.1	7.1	0.7	4.1	13.7	19.1	3.2	0.1	1.2
	Ocp	1.1	1.4	2.1	7.1	14.5	1.6	1.2	30.7	37.0	65.1
0900-1000	Pro	0.6	44.6	7.3	0.8	3.4	15.2	23.9	2.8	0.1	1.4
	Ocp	1.1	1.3	2.1	2.0	13.4	1.4	1.1	22.5	1.0	44.1
1000-1100	Pro	0.4	35.4	6.2	0.6	3.6	20.0	30.1	2.0	0.1	1.7
	Ocp	1.0	1.4	2.0	1.6	11.5	1.5	1.2	22.3	16.5	38.6
1100-1200	Pro	0.9	35.4	5.8	0.2	3.9	20.0	29.6	2.6	0.1	1.6
	Ocp	1.0	1.4	2.1	2.5	11.6	1.5	1.2	18.9	15.5	40.8
1200-1300	Pro	0.7	36.5	7.0	0.9	3.2	20.2	27.6	2.2	0.1	1.7
	Ocp	1.3	1.6	1.9	3.2	11.6	1.4	1.2	22.7	6.0	42.6
1300-1400	Pro	0.7	34.3	5.4	0.3	2.9	20.8	31.3	2.4	0.1	1.9
	Ocp	1.2	1.5	2.2	1.3	11.5	1.5	1.2	23.4	6.0	44.0
1400-1500	Pro	0.4	36.9	6.1	0.6	2.6	19.9	29.2	2.7	0.1	1.5
	Ocp	1.0	1.6	2.0	3.6	10.8	1.4	1.1	25.7	15.5	38.3
1500-1600	Pro	0.3	34.9	6.2	0.3	2.8	22.8	28.9	2.0	0.1	1.8
	Ocp	1.3	1.4	2.0	5.5	11.8	1.4	1.2	21.3	35.7	37.5
1600-1700	Pro	0.5	39.0	6.5	0.7	2.9	20.8	25.4	2.5	0.1	1.7
	Ocp	1.0	1.5	2.0	4.4	11.6	1.5	1.1	25.2	2.5	42.6
1700-1800	Pro	1.2	44.3	7.4	0.6	3.2	18.1	20.5	2.8	0.1	1.8
	Ocp	1.0	1.5	2.2	3.9	14.9	1.4	1.1	20.7	28.0	56.5
1800-1900	Pro	1.2	53.8	6.4	0.5	3.6	12.9	17.1	3.0	0.1	1.4
	Ocp	1.1	1.5	2.3	4.4	16.3	1.4	1.1	28.3	45.5	65.2
1900-2000	Pro	1.4	57.0	8.9	0.0	3.7	10.5	14.3	2.4	0.1	1.7
	Ocp	1.1	1.2	2.1	0.0	14.4	1.3	1.1	26.8	14.5	57.1
2000-2100	Pro	0.9	54.9	11.0	0.1	4.5	9.4	14.5	2.8	0.1	1.9
	Ocp	1.0	1.4	2.0	1.0	11.5	1.2	1.0	14.1	15.7	44.0
2100-2200	Pro	1.6	51.7	11.1	0.0	4.1	9.0	16.8	3.5	0.1	2.2
	Ocp	1.0	1.2	2.1	0.0	10.9	1.2	1.0	16.4	13.0	35.5
2200-2300	Pro	1.0	52.3	18.9	0.0	4.7	5.8	12.0	2.6	0.1	2.5
	Ocp	1.2	1.2	1.8	0.0	12.2	1.2	1.0	18.0	11.0	29.4
16 hours	Pro	0.9	43.8	7.8	0.5	3.7	16.3	22.7	2.8	0.1	1.7
	Ocp	1.1	1.4	2.1	4.5	12.9	1.4	1.1	23.6	17.6	47.2

Legend

Pro. Proportion of vehicles in % (Sum may not add up to 100% due to figure rounding)*

Ocp. Average occupancy of vehicles including both driver and passengers*

M&H Medium and Heavy

* All traffic data are collected from combined bounds except for one way traffic