


YEAR


2016

LINK

HENNESSY RD (from LUARD RD to FLEMING RD)

CORE STATION
ROAD NETWORK
ROAD TYPE1029
MAJOR
PRIMARY DISTRIBUTOR

1. TRAFFIC FLOW VARIATION AND GROWTH

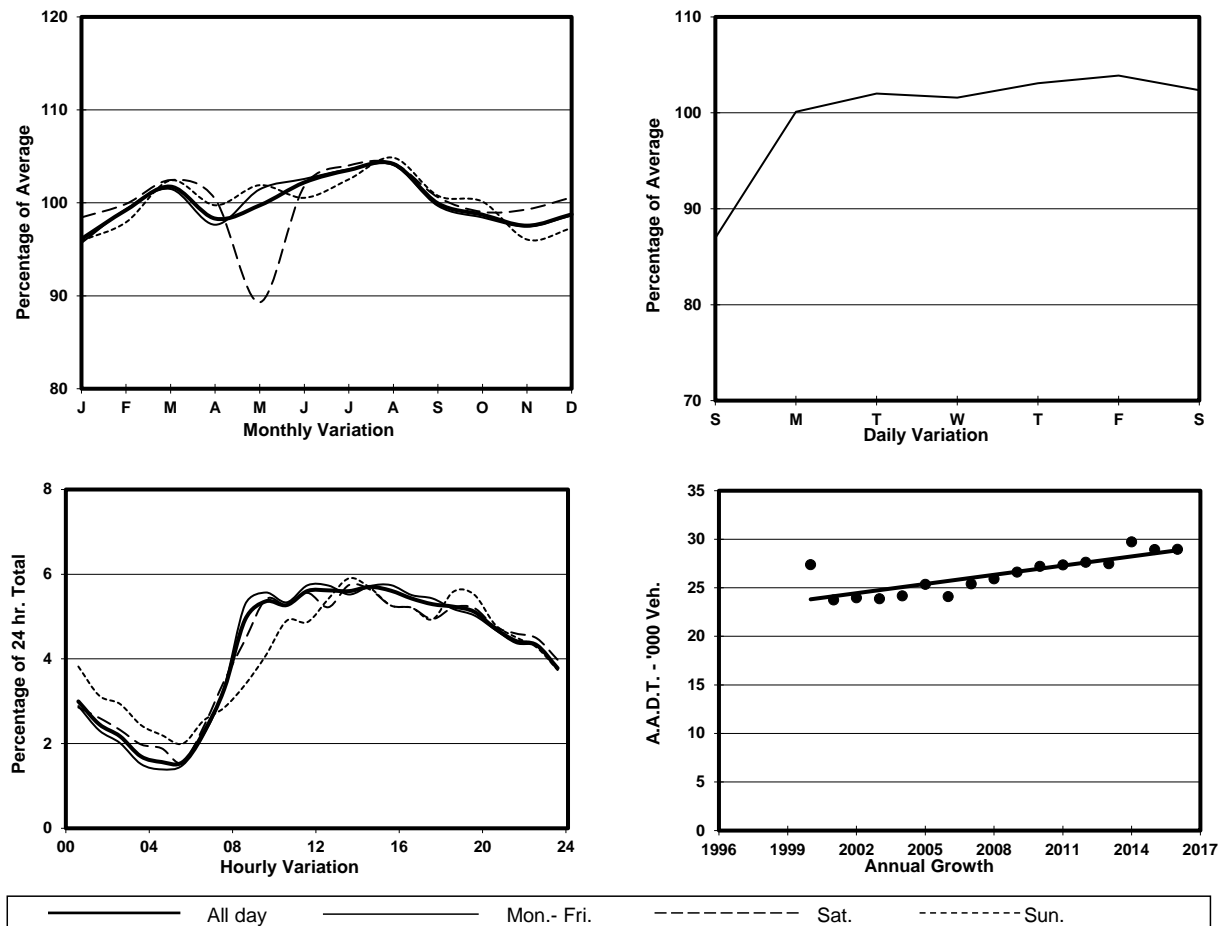

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
EAST BOUND				
A.A.D.T.	15690	16160	16420	13410
R 12 / 24 - %	61.5	62.6	59.5	57.1
R 16 / 24 - %	79.6	80.6	78.1	74.9
AM Peak Hour	0900-1000	0900-1000	0900-1000	0900-1000
One-way flow at AM peak hour	810	870	870	540
T - % (AM)	-	-	-	-
PM Peak Hour	1600-1700	1600-1700	1600-1700	1800-1900
One-way flow at PM peak hour	850	900	830	760
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-
WEST BOUND				
A.A.D.T.	13270	13630	13480	11930
R 12 / 24 - %	64.7	65.8	63.7	59.2
R 16 / 24 - %	83.8	84.7	83.2	79.8
AM Peak Hour	0900-1000	0900-1000	0900-1000	0900-1000
One-way flow at AM peak hour	740	790	750	490
T - % (AM)	-	-	-	-
PM Peak Hour	1700-1800	1700-1800	1800-1900	1800-1900
One-way flow at PM peak hour	750	790	760	660
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT