


YEAR 2016

CORE STATION 1103






ROAD NETWORK MINOR

ROAD TYPE LOCAL DISTRIBUTOR

LINK STANLEY VILLAGE RD (from TAI TAM RD to STANLEY NEW ST)



1. TRAFFIC FLOW VARIATION AND GROWTH

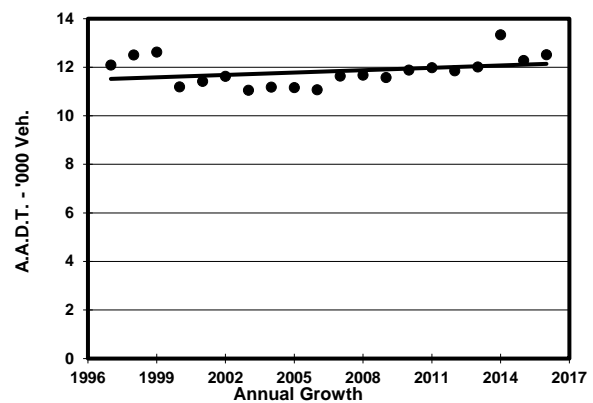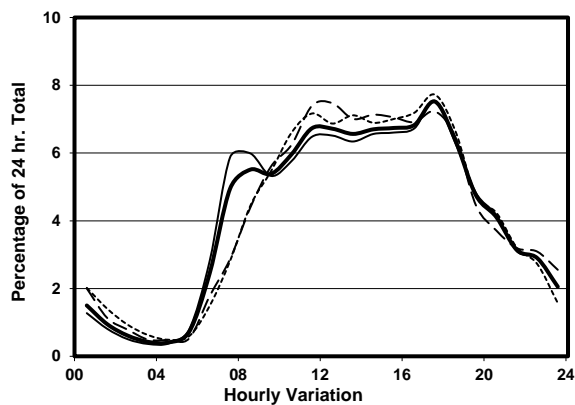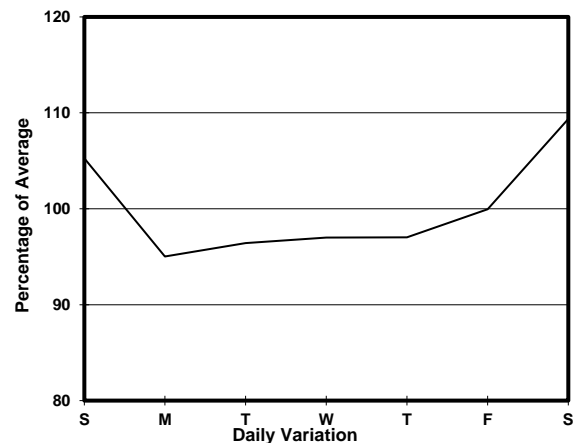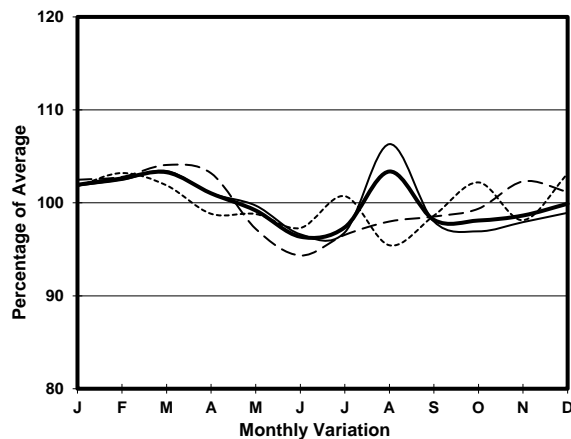

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	6190	5990	6760	6520
R 12 / 24 - %	76.5	77	75.6	75.4
R 16 / 24 - %	91	91.1	90.1	91.1
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	350	370	360	290
T - % (AM)	-	-	-	-
PM Peak Hour	1700-1800	1700-1800	1700-1800	1700-1800
One-way flow at PM peak hour	510	500	490	570
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-
NORTH BOUND				
A.A.D.T.	6320	6110	6880	6640
R 12 / 24 - %	75.5	75.1	75.9	76.6
R 16 / 24 - %	90.8	90.9	90.4	90.7
AM Peak Hour	0900-1000	0700-0800	0900-1000	0900-1000
One-way flow at AM peak hour	370	400	410	430
T - % (AM)	-	-	-	-
PM Peak Hour	1700-1800	1800-1900	1700-1800	1600-1700
One-way flow at PM peak hour	430	410	490	470
T - % (PM)	-	-	-	-
Prop.of commercial vehicles - 16 hr.	-	-	-	-

3. OTHER INFORMATION AND COMMENT