



YEAR 2016
 COVERAGE (B) STATION 6203
 ROAD NETWORK MAJOR
 ROAD TYPE PRIMARY DISTRIBUTOR

LINK CASTLE PEAK RD - KWAI CHUNG (from CHING
 CHEUNG RD to TAI WO INT)



1. TRAFFIC FLOW VARIATION AND GROWTH

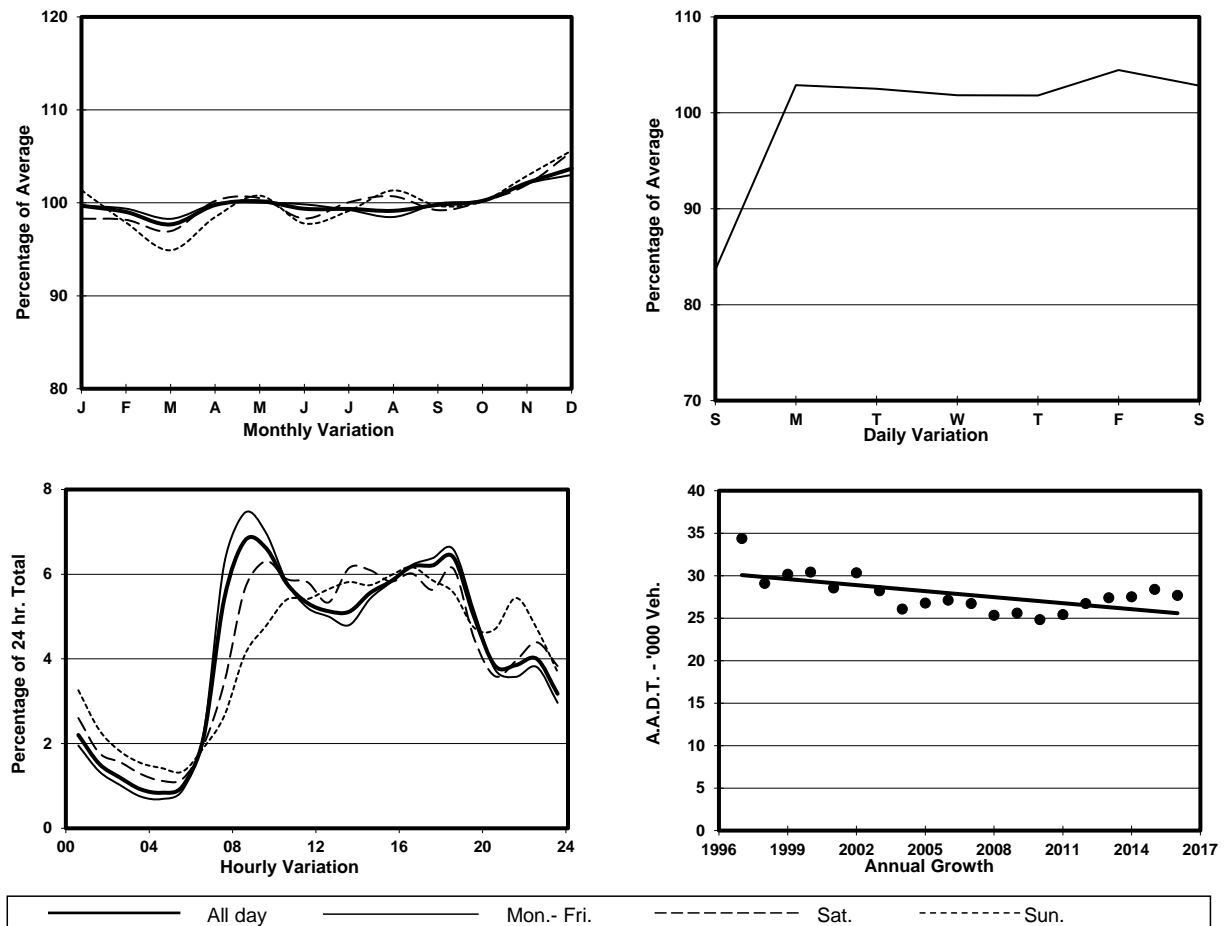

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	13730	14110	14460	11950
R 12 / 24 - %	71.5	72.9	69.5	65.2
R 16 / 24 - %	87.2	88.2	85.2	83.5
AM Peak Hour	0800-0900	0800-0900	0800-0900	0900-1000
One-way flow at AM peak hour	1060	1190	970	640
T - % (AM)	-	7	-	-
PM Peak Hour	1800-1900	1800-1900	1800-1900	1800-1900
One-way flow at PM peak hour	880	940	870	690
T - % (PM)	-	6.8	-	-
Prop.of commercial vehicles - 16 hr.	-	7.7	-	-
NORTH BOUND				
A.A.D.T.	13940	14560	14290	11360
R 12 / 24 - %	69.2	70.9	67.1	60.9
R 16 / 24 - %	86.9	88.2	84.2	81.9
AM Peak Hour	0900-1000	0900-1000	0900-1000	0900-1000
One-way flow at AM peak hour	910	1020	860	480
T - % (AM)	-	7.1	-	-
PM Peak Hour	1600-1700	1600-1700	1600-1700	1600-1700
One-way flow at PM peak hour	950	1000	950	750
T - % (PM)	-	7.8	-	-
Prop.of commercial vehicles - 16 hr.	-	8.9	-	-

3. OTHER INFORMATION AND COMMENT

4. Vehicle classification and occupancy - Monday to Friday

Time		Class of vehicle									
		Motor	Private	Taxi	Private	PLB	Goods veh.		Non	Fr. Bus	
		Cycle	Car		LB		Light	M & H	Fr. Bus	SD	DD
0700-0800	Pro	5.7	27.6	30.6	4.9	6.2	14.6	1.4	4.1	0.0	4.9
	Ocp	1.0	1.5	2.2	8.3	14.1	1.6	1.8	16.8	0.0	62.1
0800-0900 Peak hour	Pro	3.7	44.4	19.6	2.4	5.7	16.4	2.1	1.8	0.0	3.9
	Ocp	1.2	1.3	2.0	7.8	15.8	1.6	1.5	17.5	0.0	76.6
0900-1000	Pro	3.1	36.1	27.5	1.3	4.4	20.5	2.8	0.6	0.0	3.8
	Ocp	1.0	1.4	1.9	1.3	12.5	1.6	1.7	8.3	0.0	45.9
1000-1100	Pro	3.0	37.7	24.4	1.0	3.3	22.9	2.3	1.5	0.0	4.0
	Ocp	1.1	1.4	1.9	4.3	11.7	1.6	1.4	6.8	0.0	31.9
1100-1200	Pro	2.4	35.3	25.8	0.5	4.3	24.1	1.9	1.9	0.0	3.7
	Ocp	1.0	1.3	1.9	2.0	10.9	1.6	1.7	2.1	0.0	36.7
1200-1300	Pro	2.2	44.2	15.8	2.8	3.9	21.9	3.1	2.2	0.0	3.9
	Ocp	1.0	1.4	2.0	6.6	9.2	1.5	1.6	9.3	0.0	36.8
1300-1400	Pro	2.3	33.5	21.3	0.9	4.7	25.9	4.1	3.2	0.0	4.2
	Ocp	1.0	1.4	1.8	3.7	9.6	1.5	1.6	8.6	0.0	34.9
1400-1500	Pro	2.9	34.5	19.0	2.9	5.5	25.5	4.7	1.8	0.0	3.4
	Ocp	1.0	1.4	2.0	1.9	5.5	1.6	1.2	5.0	0.0	38.2
1500-1600	Pro	1.9	41.8	21.1	2.6	2.8	21.4	2.6	2.6	0.0	3.3
	Ocp	1.0	1.4	1.6	7.4	11.1	1.5	1.8	13.8	0.0	39.2
1600-1700	Pro	2.7	36.6	23.7	2.0	3.7	22.4	2.2	2.2	0.0	4.4
	Ocp	1.3	1.4	1.5	3.3	9.8	1.6	1.7	14.4	0.0	38.4
1700-1800	Pro	5.9	41.7	17.8	3.6	4.5	16.6	2.4	2.8	0.0	4.8
	Ocp	1.1	1.3	1.8	3.7	14.5	1.6	1.6	4.8	0.0	54.9
1800-1900	Pro	5.7	52.0	17.6	0.2	6.3	11.1	0.9	2.0	0.0	4.2
	Ocp	1.0	1.4	2.2	1.0	14.7	1.4	2.0	7.1	0.0	76.1
1900-2000	Pro	1.7	54.8	16.1	0.2	10.2	9.4	1.0	1.5	0.0	5.1
	Ocp	1.1	1.6	2.1	3.0	10.5	1.4	1.0	6.8	0.0	58.3
2000-2100	Pro	3.4	48.2	24.3	0.0	9.8	7.4	0.7	1.3	0.0	5.0
	Ocp	1.1	1.5	2.0	0.0	11.8	1.3	1.0	1.3	0.0	40.6
2100-2200	Pro	2.2	38.8	29.7	0.0	13.3	9.5	0.9	0.4	0.0	5.3
	Ocp	1.0	1.5	2.4	0.0	7.9	1.4	1.0	1.0	0.0	37.8
2200-2300	Pro	2.5	45.0	25.7	0.4	17.2	2.9	0.7	0.4	0.0	5.3
	Ocp	1.3	1.6	2.3	2.0	6.0	2.3	1.0	1.0	0.0	39.1
16 hours	Pro	3.3	40.9	22.2	1.7	6.1	17.5	2.2	1.9	0.0	4.2
	Ocp	1.1	1.4	2.0	5.3	10.9	1.5	1.5	9.8	0.0	48.9

Legend

Pro. Proportion of vehicles in % (Sum may not add up to 100% due to figure rounding)*

Ocp. Average occupancy of vehicles including both driver and passengers*

M&H Medium and Heavy

* All traffic data are collected from combined bounds except for one way traffic