

YEAR

2022

LINK POK FU LAM RD (from POKFIELD RD to MOUNT DAVIS RD)

COVERAGE (B) STATION

2201






ROAD NETWORK

MAJOR

ROAD TYPE

PRIMARY DISTRIBUTOR

## 1. TRAFFIC FLOW VARIATION AND GROWTH

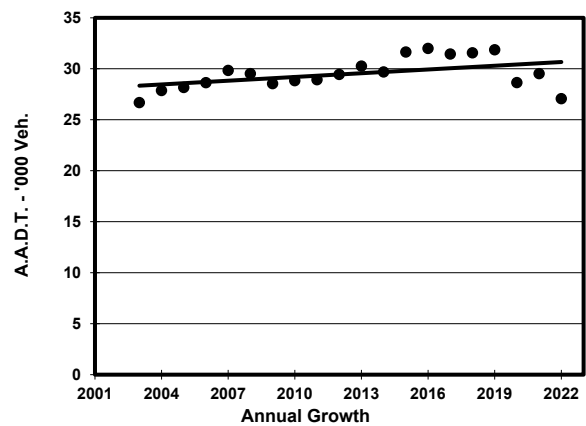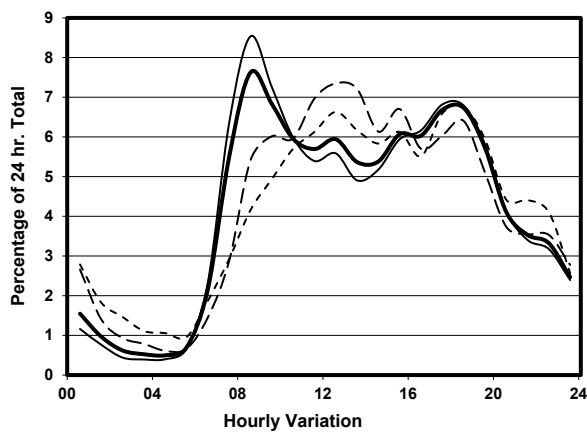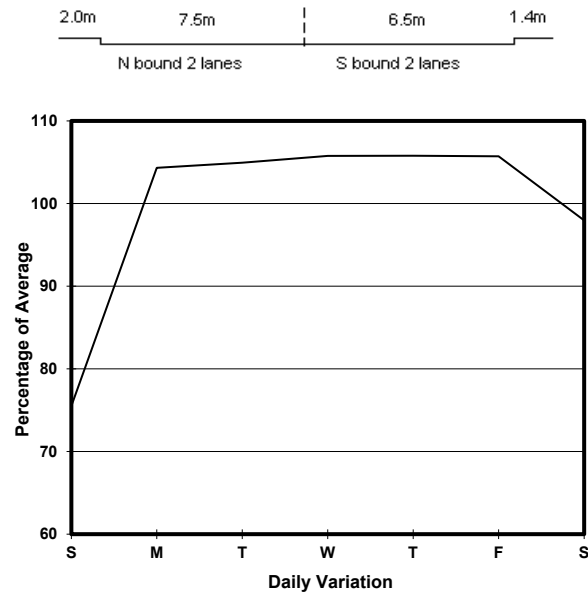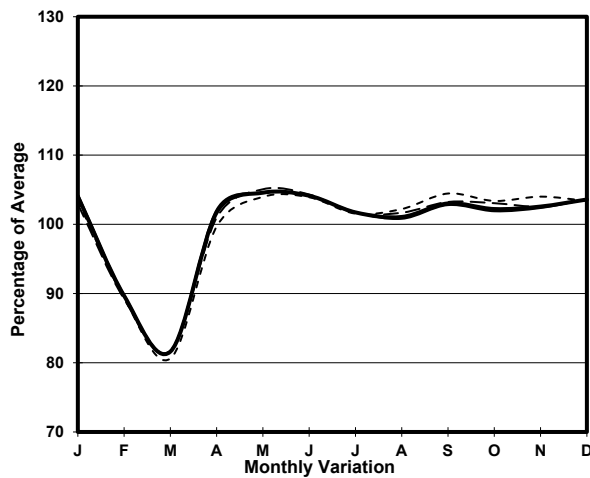

## 2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
<b>SOUTH BOUND</b>				
A.A.D.T.	9670	10330	9030	7910
R 12 / 24 - %	71.1	72	71.1	66
R 16 / 24 - %	90.1	91	88.5	86.4
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	620	720	600	380
T - % (AM)	-	10.3	-	-
PM Peak Hour	1600-1700	1600-1700	1600-1700	1700-1800
One-way flow at PM peak hour	610	690	450	500
T - % (PM)	-	10.2	-	-
Prop.of commercial vehicles - 16 hr.	-	9.3	-	-
<b>NORTH BOUND</b>				
A.A.D.T.	17390	18640	17650	12610
R 12 / 24 - %	75.3	76.6	73.7	68.4
R 16 / 24 - %	90.7	91.7	88.8	86.3
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	1440	1760	1000	630
T - % (AM)	-	6.3	-	-
PM Peak Hour	1700-1800	1700-1800	1800-1900	1800-1900
One-way flow at PM peak hour	1230	1340	1300	920
T - % (PM)	-	6.8	-	-
Prop.of commercial vehicles - 16 hr.	-	7.4	-	-

## 3. OTHER INFORMATION AND COMMENT

**4. Vehicle classification and occupancy - Monday to Friday**

Time		Class of vehicle									
		Motor Cycle	Private Car	Taxi	Private LB	PLB	Goods veh.		Non Fr. Bus	Fr. Bus	
							Light	M & H		SD	DD
0700-0800	Pro	3.4	24.8	35.6	5.2	9.8	7.4	0.9	6.1	0.0	6.7
	Ocp	1.0	1.2	1.9	8.2	13.3	1.5	1.7	15.9	0.0	54.3
0800-0900 Peak hour	Pro	2.1	49.5	26.6	2.0	6.5	5.8	1.8	1.8	0.0	3.8
	Ocp	1.0	1.4	2.1	6.2	14.3	1.5	1.3	14.1	0.0	47.9
0900-1000	Pro	0.5	42.6	31.5	1.2	5.1	12.1	2.3	1.0	0.0	3.7
	Ocp	1.0	1.3	2.0	2.7	13.7	1.5	1.3	15.3	0.0	38.8
1000-1100	Pro	1.8	39.2	30.6	1.1	5.4	14.4	1.8	1.1	0.0	4.5
	Ocp	1.1	1.3	1.9	2.0	13.0	1.4	1.5	11.8	0.0	28.7
1100-1200	Pro	2.2	38.2	28.8	3.8	6.0	12.5	2.2	1.7	0.0	4.6
	Ocp	1.0	1.3	2.0	2.2	10.5	1.4	1.7	3.3	0.0	27.7
1200-1300	Pro	5.0	40.0	25.5	2.7	5.2	12.5	1.5	3.0	0.0	4.6
	Ocp	1.0	1.3	1.9	6.6	12.8	1.6	1.7	12.8	0.0	26.4
1300-1400	Pro	5.6	30.6	26.0	3.6	7.3	16.3	1.9	3.6	0.0	4.9
	Ocp	1.0	1.5	1.9	6.5	9.4	1.5	1.1	12.7	0.0	28.8
1400-1500	Pro	3.3	38.1	34.1	1.3	4.4	9.2	3.1	2.0	0.0	4.5
	Ocp	1.0	1.4	2.0	2.5	11.1	1.4	1.4	16.8	0.0	31.0
1500-1600	Pro	3.2	34.3	29.2	2.6	4.9	17.5	1.9	2.1	0.0	4.3
	Ocp	1.0	1.4	1.9	3.2	11.9	1.3	1.2	16.4	0.0	27.7
1600-1700	Pro	2.4	43.1	29.0	1.4	5.0	11.3	2.0	1.6	0.0	4.3
	Ocp	1.0	1.3	2.1	4.0	11.2	1.7	1.3	12.9	0.0	37.4
1700-1800	Pro	5.4	41.4	29.4	0.9	4.7	10.3	0.2	3.0	0.0	4.7
	Ocp	1.0	1.4	2.1	1.6	14.8	1.4	1.0	13.6	0.0	55.1
1800-1900	Pro	3.3	55.5	26.1	0.2	4.0	5.0	0.3	1.8	0.0	3.8
	Ocp	1.1	1.3	2.1	1.0	16.7	1.2	1.0	16.0	0.0	57.7
1900-2000	Pro	4.7	49.3	32.7	0.2	3.5	4.2	0.2	0.2	0.0	5.0
	Ocp	1.1	1.4	1.9	4.0	11.9	1.4	2.0	12.0	0.0	31.2
2000-2100	Pro	6.5	35.4	45.8	0.4	4.3	1.8	0.0	0.0	0.0	5.8
	Ocp	1.0	1.3	1.7	2.0	9.3	1.2	0.0	0.0	0.0	20.6
2100-2200	Pro	5.3	35.8	43.3	0.0	5.7	2.2	0.0	0.0	0.0	7.6
	Ocp	1.0	1.3	1.9	0.0	11.9	1.2	0.0	0.0	0.0	21.4
2200-2300	Pro	4.2	37.3	41.5	0.5	6.8	2.6	0.0	0.5	0.0	6.6
	Ocp	1.0	1.5	1.8	2.0	11.5	1.2	0.0	1.0	0.0	19.2
16 hours	Pro	3.4	41.0	30.8	1.7	5.4	9.6	1.4	1.9	0.0	4.7
	Ocp	1.0	1.3	2.0	4.7	12.6	1.4	1.4	13.7	0.0	36.2

**Legend: Pro.** Proportion of vehicles in % (Sum may not add up to 100% due to figure rounding)\*

**Ocp.** Average occupancy of vehicles including both driver and passengers\*

**M&H** Medium and Heavy

\* All traffic data are collected from combined bounds