


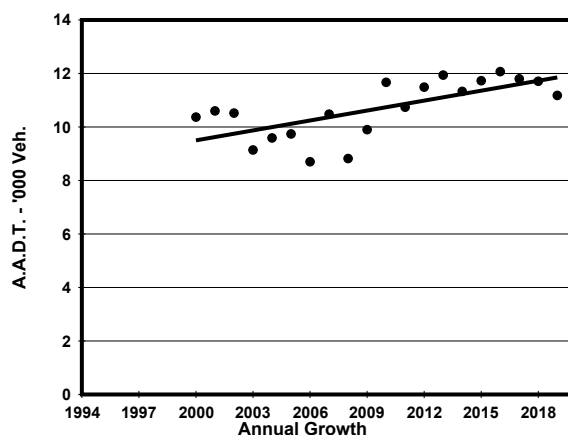
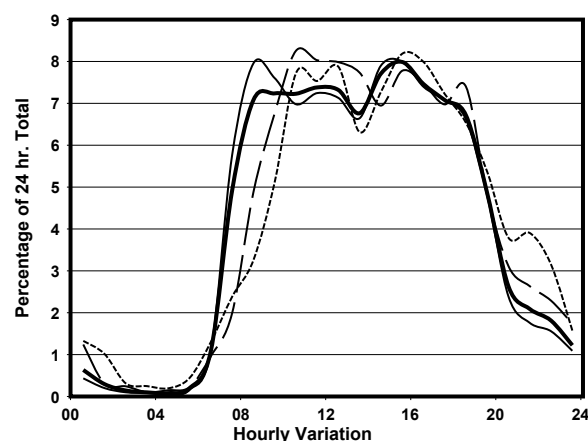


YEAR 2019  
 COVERAGE (B) STATION 2203  
 ROAD NETWORK MAJOR  
 ROAD TYPE DISTRICT DISTRIBUTOR

LINK STUBBS RD (from WAN CHAI GAP RD to WONG NAI CHUNG GAP RD)

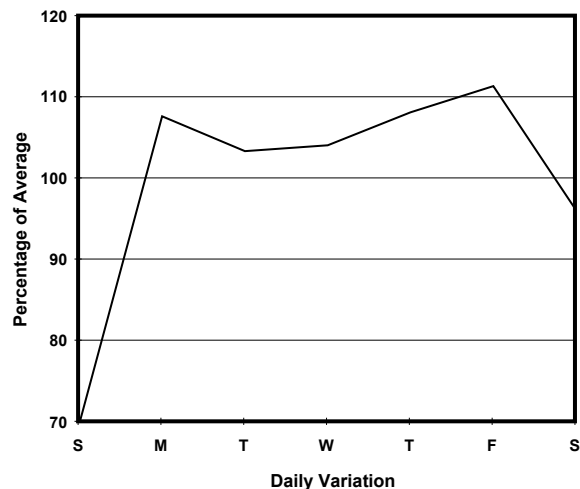

## 1. TRAFFIC FLOW VARIATION AND GROWTH

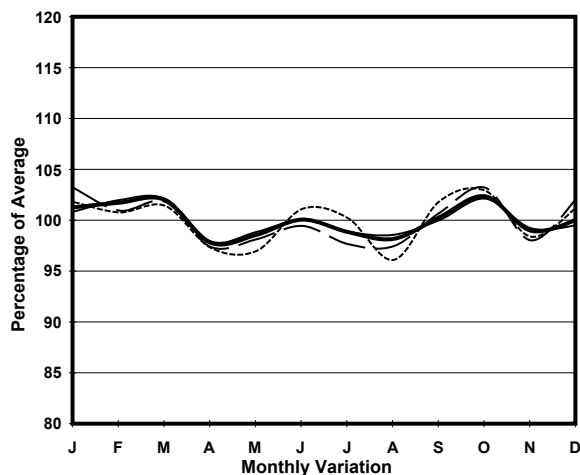

## 2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
<b>SOUTH BOUND</b>				
A.A.D.T.	5760	6220	5640	4260
R 12 / 24 - %	84.4	85.6	82.6	77.8
R 16 / 24 - %	96.2	96.9	94.7	93.3
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	400	480	390	200
T - % (AM)	-	8.3	-	-
PM Peak Hour	1600-1700	1600-1700	1600-1700	1600-1700
One-way flow at PM peak hour	430	450	440	350
T - % (PM)	-	12	-	-
Prop.of commercial vehicles - 16 hr.	-	11	-	-
<b>NORTH BOUND</b>				
A.A.D.T.	5420	5930	5270	3670
R 12 / 24 - %	85.4	87	81.8	77
R 16 / 24 - %	96.3	96.7	95.4	93.9
AM Peak Hour	0900-1000	0900-1000	0900-1000	0900-1000
One-way flow at AM peak hour	430	500	350	210
T - % (AM)	-	5.8	-	-
PM Peak Hour	1700-1800	1700-1800	1800-1900	1600-1700
One-way flow at PM peak hour	410	450	400	290
T - % (PM)	-	16.3	-	-
Prop.of commercial vehicles - 16 hr.	-	12.7	-	-

## 3. OTHER INFORMATION AND COMMENT

**4. Vehicle classification and occupancy - Monday to Friday**

Time		Class of vehicle									
		Motor Cycle	Private Car	Taxi	Private LB	PLB	Goods veh.		Non Fr. Bus	Fr. Bus	
							Light	M & H		SD	DD
0700-0800	Pro	2.4	56.1	29.3	3.2	1.6	1.6	0.8	3.2	0.0	2.0
	Ocp	1.0	1.8	1.5	3.0	3.0	2.0	1.0	2.0	0.0	33.9
0800-0900	Pro	1.5	63.3	19.0	1.5	2.0	3.0	3.5	4.5	0.0	1.7
	Ocp	1.0	1.5	1.8	6.0	4.0	1.7	1.1	8.3	0.0	35.3
0900-1000	Pro	0.9	47.7	29.5	0.0	1.8	11.4	3.6	3.6	0.0	1.5
	Ocp	1.5	1.5	1.9	0.0	3.0	1.8	1.3	16.1	0.0	24.6
1000-1100	Pro	2.3	52.1	13.8	0.0	1.1	16.6	8.0	4.0	0.0	2.0
	Ocp	1.3	1.6	1.6	0.0	5.5	1.8	1.2	17.3	0.0	22.9
1100-1200	Pro	6.3	54.1	12.7	0.5	1.0	14.1	3.9	5.4	0.0	2.0
	Ocp	1.1	1.4	1.9	1.0	2.5	1.7	1.4	14.3	0.0	27.6
1200-1300	Pro	2.1	46.6	21.4	0.0	1.1	17.1	1.1	8.0	0.0	2.5
	Ocp	1.0	1.7	1.9	0.0	6.5	1.5	1.0	10.5	0.0	32.2
1300-1400	Pro	0.0	49.5	23.6	0.0	1.2	10.6	2.4	10.0	0.0	2.8
	Ocp	0.0	1.5	2.0	0.0	6.5	1.5	1.8	16.6	0.0	45.3
1400-1500	Pro	3.6	55.1	13.8	0.0	1.5	9.7	2.6	11.7	0.0	2.0
	Ocp	1.0	1.6	1.9	0.0	4.3	1.6	1.4	18.7	0.0	41.7
1500-1600 Peak hour	Pro	1.9	51.4	19.2	0.5	1.0	7.7	3.8	12.5	0.0	2.0
	Ocp	1.0	1.6	2.2	3.0	5.0	1.9	1.0	22.5	0.0	50.4
1600-1700	Pro	0.5	55.6	13.5	1.6	1.1	10.8	1.1	13.5	0.0	2.3
	Ocp	2.0	1.6	2.3	2.0	17.0	2.0	1.5	15.8	0.0	49.2
1700-1800	Pro	2.5	65.2	15.3	0.0	1.0	5.4	0.5	7.4	0.0	2.7
	Ocp	1.2	1.7	2.2	0.0	14.5	1.9	2.0	17.9	0.0	55.5
1800-1900	Pro	1.0	66.0	20.2	0.5	2.0	3.0	0.0	5.5	0.0	1.8
	Ocp	1.0	1.4	1.8	1.0	11.5	1.5	0.0	18.8	0.0	53.6
1900-2000	Pro	1.0	75.6	15.1	0.0	2.0	0.5	0.0	3.0	0.0	2.8
	Ocp	1.0	1.5	2.2	0.0	6.5	1.0	0.0	15.5	0.0	43.2
2000-2100	Pro	2.9	54.9	17.3	0.0	2.9	4.3	0.0	10.1	0.0	7.6
	Ocp	1.5	1.2	1.8	0.0	3.0	2.0	0.0	13.9	0.0	37.9
2100-2200	Pro	0.0	61.7	22.6	0.0	3.0	0.0	0.0	6.0	0.0	6.8
	Ocp	0.0	1.4	1.9	0.0	2.5	0.0	0.0	12.0	0.0	27.9
2200-2300	Pro	7.8	59.1	18.7	0.0	3.1	4.7	0.0	1.6	0.0	5.1
	Ocp	1.2	1.6	1.6	0.0	3.0	1.0	0.0	1.0	0.0	17.9
16 hours	Pro	2.1	57.0	18.8	0.5	1.5	8.2	2.2	7.1	0.0	2.5
	Ocp	1.1	1.5	1.9	3.2	6.1	1.7	1.3	16.2	0.0	38.5

**Legend: Pro.** Proportion of vehicles in % (Sum may not add up to 100% due to figure rounding)\*

**Ocp.** Average occupancy of vehicles including both driver and passengers\*

**M&H** Medium and Heavy

\* All traffic data are collected from combined bounds