

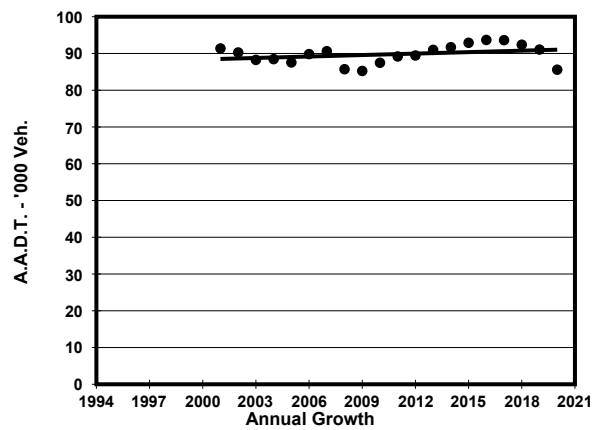
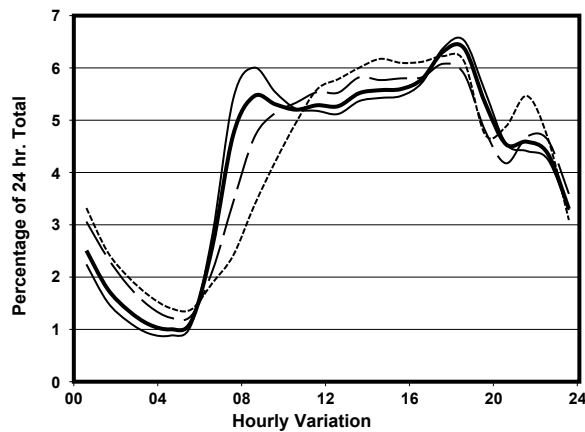


YEAR 2020
CORE STATION 5024
ROAD NETWORK MAJOR
ROAD TYPE URBAN TRUNK ROAD

LINK LION ROCK TUNNEL (from TOLL PLAZA to SOUTH PORTAL)

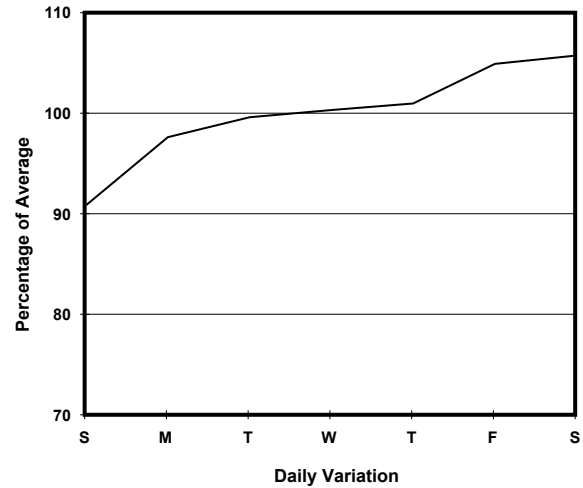

1. TRAFFIC FLOW VARIATION AND GROWTH

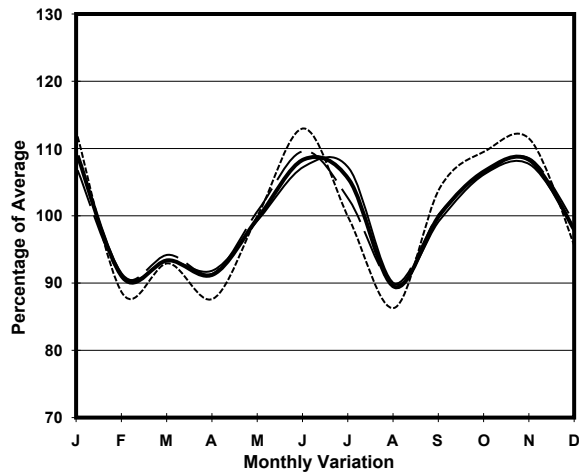

— All day — Mon.- Fri. Sat. - - - - Sun.

2. TRAFFIC CHARACTERISTICS (BY DIRECTION)

Parameter	All - Day	Mon. - Fri.	Sat.	Sun.
SOUTH BOUND				
A.A.D.T.	42250	42700	44940	38830
R 12 / 24 - %	70.9	71.9	69	67.3
R 16 / 24 - %	86.4	86.9	85	85
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	2670	2960	2730	1920
T - % (AM)	-	7.5	-	-
PM Peak Hour	1800-1900	1800-1900	1700-1800	1700-1800
One-way flow at PM peak hour	2660	2730	2710	2460
T - % (PM)	-	6.7	-	-
Prop.of commercial vehicles - 16 hr.	-	8.6	-	-
NORTH BOUND				
A.A.D.T.	43340	43880	46050	39440
R 12 / 24 - %	62.1	62.9	60.7	58.8
R 16 / 24 - %	84.1	85.4	81.2	80.7
AM Peak Hour	0800-0900	0800-0900	0900-1000	0900-1000
One-way flow at AM peak hour	2000	2240	1950	1370
T - % (AM)	-	12.9	-	-
PM Peak Hour	1800-1900	1800-1900	1700-1800	1600-1700
One-way flow at PM peak hour	2800	2920	2820	2450
T - % (PM)	-	5.3	-	-
Prop.of commercial vehicles - 16 hr.	-	9.4	-	-

3. OTHER INFORMATION AND COMMENT

4. Vehicle classification and occupancy - Monday to Friday

Time		Class of vehicle									
		Motor Cycle	Private Car	Taxi	Private LB	PLB	Goods veh.		Non Fr. Bus	Fr. Bus	
							Light	M & H		SD	DD
0700-0800	Pro	3.4	60.0	9.7	0.6	0.1	14.7	4.3	2.7	0.1	4.4
	Ocp	1.0	1.4	2.0	4.1	7.0	1.2	1.1	9.8	15.0	30.5
0800-0900	Pro	2.8	59.0	9.8	0.6	0.1	17.9	3.8	1.5	0.1	4.3
	Ocp	1.0	1.3	2.0	2.1	4.0	1.5	1.2	6.6	17.8	33.2
0900-1000	Pro	1.6	52.2	10.6	0.6	0.1	22.9	5.9	0.8	0.1	5.2
	Ocp	1.0	1.3	2.0	3.3	1.0	1.5	1.2	1.4	9.5	19.4
1000-1100	Pro	0.7	49.8	12.9	0.6	0.0	24.7	5.8	1.2	0.1	4.3
	Ocp	1.1	1.4	2.0	2.9	0.0	1.4	1.1	2.1	17.3	21.7
1100-1200	Pro	1.9	47.0	14.6	1.0	0.0	24.5	6.1	1.2	0.1	3.8
	Ocp	1.1	1.4	1.8	2.6	0.0	1.4	1.3	4.2	3.0	22.8
1200-1300	Pro	1.6	54.6	11.7	1.0	0.1	20.9	4.7	1.4	0.1	4.0
	Ocp	1.0	1.4	1.9	2.3	1.0	1.4	1.2	4.1	10.0	22.3
1300-1400	Pro	2.3	52.3	12.6	1.3	0.0	23.0	4.1	1.0	0.1	3.3
	Ocp	1.1	1.5	1.9	2.6	0.0	1.4	1.2	5.5	8.5	31.4
1400-1500	Pro	1.4	55.5	9.1	1.2	0.0	22.2	6.4	0.8	0.1	3.3
	Ocp	1.0	1.5	1.8	1.9	0.0	1.4	1.1	3.2	7.0	29.5
1500-1600	Pro	1.6	52.1	12.7	0.7	0.0	23.5	4.5	1.0	0.1	3.9
	Ocp	1.0	1.5	1.8	1.3	0.0	1.3	1.3	4.3	7.0	26.2
1600-1700	Pro	2.2	50.9	13.0	0.4	0.0	23.5	4.5	1.1	0.1	4.4
	Ocp	1.0	1.6	1.6	1.3	0.0	1.4	1.2	4.2	5.0	28.7
1700-1800	Pro	4.4	57.3	10.0	0.8	0.2	20.3	1.7	0.7	0.1	4.6
	Ocp	1.1	1.4	1.9	3.3	15.5	1.4	1.3	13.3	13.7	40.0
1800-1900 Peak hour	Pro	3.0	69.9	7.6	0.3	0.4	12.8	1.4	1.0	0.1	3.6
	Ocp	1.1	1.3	2.0	1.8	11.0	1.3	1.1	22.9	17.0	47.7
1900-2000	Pro	1.9	72.6	9.9	0.2	0.4	8.7	1.2	1.5	0.1	3.5
	Ocp	1.1	1.4	2.0	2.0	11.0	1.2	1.0	22.2	11.3	40.6
2000-2100	Pro	2.4	66.9	15.7	0.0	0.6	8.0	1.2	0.9	0.1	4.4
	Ocp	1.1	1.4	1.8	0.0	8.0	1.3	1.0	5.7	11.0	29.9
2100-2200	Pro	2.9	59.2	22.9	0.1	0.5	7.8	1.9	0.3	0.1	4.4
	Ocp	1.2	1.4	1.9	2.0	11.0	1.4	1.4	13.3	9.5	31.2
2200-2300	Pro	1.9	62.7	21.2	0.2	0.5	6.8	1.2	0.6	0.1	4.7
	Ocp	1.3	1.4	1.8	1.5	6.2	1.3	1.1	1.3	5.5	31.0
16 hours	Pro	2.3	57.8	12.4	0.6	0.2	17.7	3.7	1.1	0.1	4.1
	Ocp	1.1	1.4	1.9	2.5	8.6	1.4	1.2	8.4	11.2	30.3

Legend: Pro. Proportion of vehicles in % (Sum may not add up to 100% due to figure rounding)*

Ocp. Average occupancy of vehicles including both driver and passengers*

M&H Medium and Heavy

* All traffic data are collected from combined bounds